

# NITE STAR™



MATERIAL\*



FOR USE WITH



Power Supplies



Options




Mounting

"I love this fixture because...it's so many fixtures in one. The solid housing with the weatherproof lens. Clean simple lines...the best part is, if the application changes where you specified the product, or if you made a mistake (which we all do time to time) you can swap out the optics or turn up/down on the 'adjust-e-lume®' to get the lighting you need. My quote is "Nite Star™, So Bright what do you want to light up tonight!"

*Craig Barnhart, H. F. Lenz Company, BKU Fall 2012*



Shown in  
Machined Stainless Steel (MAC) finish

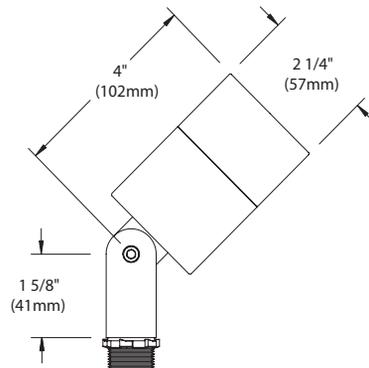

An architectural profile reminiscent of beautifully classic roof lines delivers significant light output in this modern LED wall sconce suitable for both indoor and outdoor applications. The Pitch Single's die-cast metal body houses powerful LED light sources that create visual appeal as light cascades down along a wall.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

### Can be mounted for up lighting or down lighting

**PROJECT: 180 BEAR GULCH**  
**TYPE: L2**

## SPECIFICATIONS

DELIVERED LUMENS	823
WATTS	26.1
VOLTAGE	120V, 277V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Downlight or Uplight
CCT	2700K, 3000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	1.2 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



PITCH SINGLE  
shown in black



PITCH SINGLE  
shown in bronze



PITCH SINGLE  
shown in charcoal




PITCH SINGLE  
shown in silver

## ORDERING INFORMATION

700WSPIT	SIZE	FINISH	LAMP
S	SINGLE	B BLACK	-LED827 LED 80 CRI, 2700K 120V
		Z BRONZE	-LED827277 LED 80 CRI, 2700K 277V
		H CHARCOAL	-LED830 LED 80 CRI, 3000K 120V
		I SILVER	-LED830277 LED 80 CRI, 3000K 277V

# PITCH SINGLE WALL SCONCE




Pitch Single

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### PITCH SINGLE

Total Lumen Output: 823  
 Total Power: 26.2  
 Luminaire Efficacy: 31.4  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B1-U0-G0

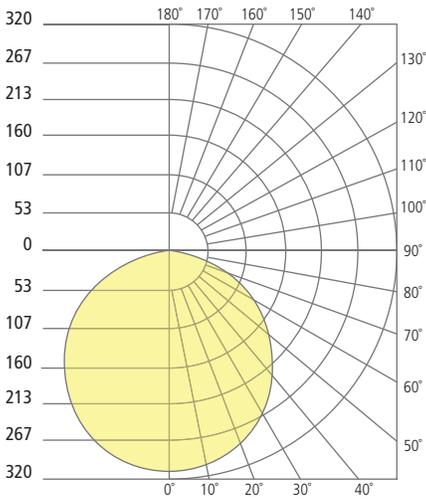

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



GENERATION BRANDS

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

# VERSA STAR™ VS



MATERIAL



FOR USE WITH



Power Supplies






Options

"B-K designs their luminaires with the lighting designers' needs and wants in mind. Besides the excellent performance, the quality craftsmanship and the attention to details, we can always count on B-K's support like a family."

*Joseph Yam, Prudential Lighting, Summer 2010*



Shown in Satin Aluminum (SAP) finish





# RECTANGLE STEP LIGHTS 12V

4011

# WAC

## LANDSCAPE LIGHTING

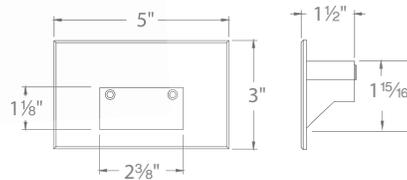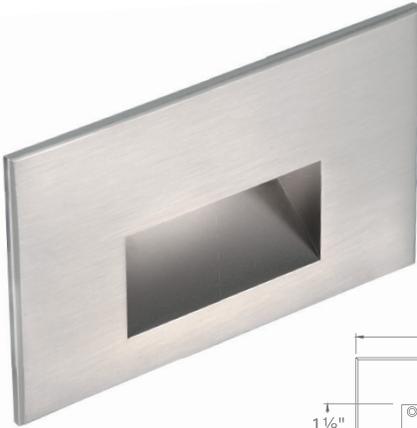Fixture Type: Catalog Number: 

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Horizontal rectangle step light designed for safety and style on stairways, patios, decks, balcony areas, walkways and building perimeters.

Features an architectural design. Energy efficient for long-lasting outdoor lighting solutions. Creates an attractive, romantic impression at night.

### FEATURES

- Solid diecast brass, corrosion resistant aluminum alloy, or cast stainless steel construction
- IP66 rated, Protected against high-pressure water jets
- Conveniently adapts into existing 12V system
- Invisible hardware
- Maintains constant lumen output against voltage drop
- UL 1838 Listed

### SPECIFICATIONS

<b>Input:</b>	9-15VAC (Transformer is required)
<b>Power:</b>	2W / 3.1VA
<b>CRI:</b>	90
<b>Mounting:</b>	Fits into 2" x 4" J-Box with minimum inside dimensions of 3"L x 2"W x 2"H. Includes bracket for J-Box mount.
<b>Rated Life:</b>	60,000 hours

### ORDERING NUMBER

		Color Temp	CRI	Finish	Lumens	
4011	12V	27	2700K	90	<b>BBR</b> Bronze on Brass	17
					<b>BK</b> Black on Aluminum	17
					<b>BZ</b> Bronze on Aluminum	17
					<b>WT</b> White on Aluminum	38
	30	3000K	90	<b>BBR</b> Bronze on Brass	17	
				<b>BK</b> Black on Aluminum	17	
				<b>BZ</b> Bronze on Aluminum	17	
				<b>WT</b> White on Aluminum	38	
	AM	Amber	-	<b>SS</b> Cast Stainless Steel	23	
				<b>BBR</b> Bronze on Brass	11	
				<b>BK</b> Black on Aluminum	11	
				<b>BZ</b> Bronze on Aluminum	11	
					<b>WT</b> White on Aluminum	23
					<b>SS</b> Cast Stainless Steel	14

4011-\_\_\_\_\_

Example: 4011-30BK

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# RECTANGLE STEP LIGHTS 12V

4011

# WAC

## LANDSCAPE LIGHTING

### Magnetic Transformers

*Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed  
See transformer spec sheet for details and its accessories*



**9075-TRN-SS**  
75W Max

**9150-TRN-SS**  
150W Max

**9300-TRN-SS**  
300W Max

**9600-TRN-SS**  
600W Max

### TESTED MAGNETIC LOW VOLTAGE (MLV) DIMMERS


Luminaire	Dimmer					
	Manufacturer	Family	Model	Power Rating	Range*	Note
<b>4011</b>	Lutron	Diva	DVLV-600	600W	23% - 100%	
		Skylark	SLV-600P	600W	17% - 100%	Best performance
		Skylark	S-10P	1000W		Not recommended

\*Low end of this range is determined by output current which may not directly translate to the perceived light output


WAC Lighting fixtures are compatible with a variety of dimmers. For your convenience we have included a compatibility chart showing dimmers which have been tested with our products. The recommended list below is based upon testing conducted in a lab, and the results can vary in certain field applications due to a number of factors. Exclusion from the list does not imply incompatibility, just that it has not been tested by WAC Lighting. Please reference the dimmer manufacturer's instructions for installation, or contact a WAC lighting professional at 800-526-2588.

### Spacing Recommendations for Optimal Light Distribution


Corridors / Hallways



Stairs - Wall Mount



Stairs - Step Mount



Mount in center of stair as close to the upper tread as possible. For best results use one light per step for steps narrower than 5 feet

**waclighting.com**  
Phone (800) 526.2588  
Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive  
Port Washington, NY 11050

**Central Distribution Center**  
1600 Distribution Ct  
Lithia Springs, GA 30122

**Western Distribution Center**  
1750 Archibald Avenue  
Ontario, CA 91760